
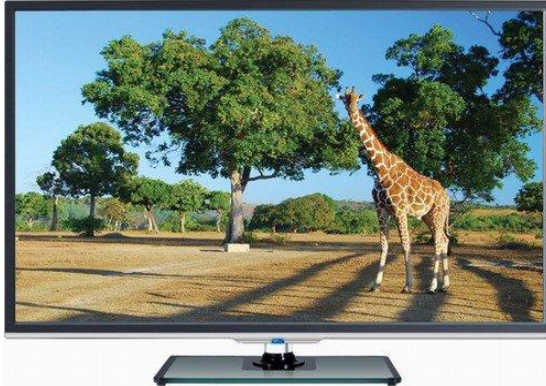


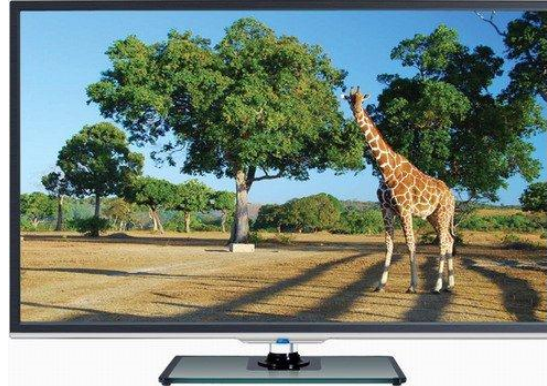

SANTS سانس
جروب GROUP

BRINGING YOUR DREAMS TO REALITY

Model		SIT42A	SIT60A
Decription		42 inch led display	60 inch led display
General	Picture		
	Panel	LED	LED
	Screen size	42 inch	60 inch
	Aspect Ratio	16:09	16:09
	Brightness	350cd	350cd
	Resolution	1920x1080	1920x1080
	Contrast Ratio	3000:01:00	3000:01:00
	Maximun Colors	16.7M	16.7M
	OSD Language	ese,Russian,Arabic etc.	ese,Russian,Arabic etc.
Response Time	4m/s	4m/s	

📍 Cairo, EGYPT. 3 Abou Tamam st., Hadayak El Kobba. (+2) 02 233 023 99 (+2) 01 22 22 00 787
 📍 Shenzhen, CHINA. 1709B Saige st., Hua Qlang Bel, Futian District.
 📍 Kowloon, Hong Kong. 5/f Hang Pont Commercial Building ., 31 Tonkin st., Cheung Sha Wan.
 📍 Vietnam : 0084-1688370651 📍 Malaysia : (+6)13416407902 📍 Kuwwait : (+9)6560617291 📍 Sudan : (+2)49910745498
 🌐 www.santsgroup.com ✉ info@santsgroup.com



	Solution	MTK	MTK
	View Angle	178°/178°	178°/178°
	SKD support	SKD support	SKD support
	Sleep on/Off Timer	Yes	Yes
Picture Quality	Display Format	720p,1080i ,1080p	720p,1080i ,1080p
	Vertical scan rate(KHz)	60HZ	60HZ
	Color Adjust	Yes	Yes
Features	impressive visual effects;	impressive visual effects;	impressive visual effects;
	Light weight structure,glossy-	Light weight structure,glossy-black appear ance	Light weight structure,glossy-black appear ance
ports	Headphone Jack	Yes	Yes
	VGA Input	*1	*1
	HDMI	*1	*1
	USB	*1	*1
	PC Audio Input	*1	*1
	Headphone Jack	*1	*1
Sound	Audio Output	3W+3W/60hm	3W+3W/60hm
	Stereo	Yes	Yes
Power	Working Power Consumption	35W/H	35W/H
	Stand by Power Consumption	0.3W	0.3W
	AC Power Consumption	AC 100-240V,50/60 Hz	AC 100-240V,50/60 Hz
USB 2.0 Slot	Vedio Support	MPEG1,MPEG2,MPEG4,MKV	MPEG1,MPEG2,MPEG4,MKV
	Audio Support	MP3,WMA	MP3,WMA
	Photo Support	JPEG,BMP	JPEG,BMP

📍 Cairo, EGYPT. 3 Abou Tamam st., Hadayak El Kobba. (+2) 02 233 023 99 (+2) 01 22 22 00 787

📍 Shenzhen, CHINA. 1709B Saige st., Hua Qlang Bel, Futian District.

📍 Kowloon, Hong Kong. 5/f Hang Pont Commercial Building ., 31 Tonkin st., Cheung Sha Wan.

📍 Vietnam : 0084-1688370651 📍 Malaysia : (+6)13416407902 📍 Kuwwait : (+9)6560617291 📍 Sudan : (+2)49910745498



Picture



Specification model	
Model No.	SIT 2
Panel size	55" TFT-LCD
Display area(mm)/mode	1210mm×682mm
Maximum resolution	1920×1080
Display color	16.7M
Pixel Pitch(mm)	0.63(H)×0.63(V)
Brightness (nits)	500cd/m ²
Contrast	1500:1
Visual angle	178°/178°
Response time	5ms
Horizontal frequency	30-75KHZ
Vertical frequency	56-75KHZ
Life(hrs)	60,000(hrs)
Input and output	
Composite video input	3 (BNC×3)
YPbPr input	1 (BNC×3)
S-video input	2 (BNC×2)
VGA	1
HDMI	1
DVI	1
Composite video output	2 (BNC×2)
Video	
Color system	PAL/NTSC/SECAM
Compatible HDMI input/DVI	480P,576P,720P,1080I,1080P
3D Comb filter	Yes
Video reduction noise	Yes
Audio	
Audio jackets	yes
Loudspeaker	5W*2
OSD display(screen menu display)	
Menu language	Chinese/English



Power	
Power supply	AC100V~240V,50/60Hz
Maximum power consumption	≅ 320W
Standby power consumption	3W
Temperature	
Working temperature	0°C~50°C
Storage temperature	-20°C~60°C
Working humidity	10%~90%
Storage humidity	10%~90%
Appearance	
Body dimension(Lx W x H)mm	1299.8mm×766mm×126mm
Panel color/appearance	White,black,customized
Case Material	Metal
Net weight	50kg
Installation	wall-mounted

📍 Cairo, EGYPT. 3 Abou Tamam st., Hadayak El Kobba. (+2) 02 233 023 99 (+2) 01 22 22 00 787

📍 Shenzhen, CHINA. 1709B Saige st., Hua Qlang Bel, Futian District.

📍 Kowloon, Hong Kong. 5/f Hang Pont Commercial Building ., 31 Tonkin st., Cheung Sha Wan.

📍 Vietnam : 0084-1688370651 📍 Malaysia : (+6)13416407902 📍 Kuwwait : (+9)6560617291 📍 Sudan : (+2)49910745498



Picture		
Specifications		
Model No.	SIT1	
Panel size	42" TFT-LCD	
Display area(mm)/mode	930.2(W)x523.0(H) 16:9	
Maximum resolution	1920x1080	
Display color	16.7M	
Pixel Pitch(mm)	0.4845(H)x0.4845(V)	
Brightness (nits)	400cd/m²	
Contrast	4000:1	
Visual angle	178°/178°	
Response time	5ms	
Horizontal frequency	30-75KHZ	
Vertical frequency	56-75KHZ	
Life(hrs)	60,000(hrs)	
Touch screen		
Size	42inch	
Type	Infrared	
Input and output		
HDMI1.4	3 (BNCx3)	
DP1.2	1 (BNCx3)	
S-video	2 (BNCx2)	
VGA	1	
HDMI	1	
USB	1	
Composite video output	2 (BNCx2)	
Video		
Color system	PAL/NTSC/SECAM	
Compatible HDMI/DVI input	480P,576P,720P,1080i,1080P	
3D Comb filter	Yes	
Video reduction noise	Yes	
Audio		
Audio jackets	yes	
Loudspeaker	5W*2	



OSD display(screen menu display)	
Menu language	Chinese/English
Power	
Power supply	AC100V~240V,50/60Hz
Maximum power consumption	≅ 500W
Standby power consumption	3W
Temperature	
Working temperature	0℃~50℃
Storage temperature	-20℃~60℃
Working humidity	10%~90%
Storage humidity	10%~90%
Appearance	
Body dimension(Lx W x H)mm	around 2000*1200*100mm
Panel color/appearance	White,black,customized
Case Material	Metal
Net weight	100kg
Installation	Wall-mounted

- 📍 Cairo, EGYPT. 3 Abou Tamam st., Hadayak El Kobba. (+2) 02 233 023 99 (+2) 01 22 22 00 787
- 📍 Shenzhen, CHINA. 1709B Saige st., Hua Qiang Bel, Futian District.
- 📍 Kowloon, Hong Kong. 5/f Hang Pont Commercial Building ., 31 Tonkin st., Cheung Sha Wan.
- 📍 Vietnam : 0084-1688370651 📍 Malaysia : (+6)13416407902 📍 Kuwwait : (+9)6560617291 📍 Sudan : (+2)49910745498

